




## SSB 550 Stream-spreading conveyor

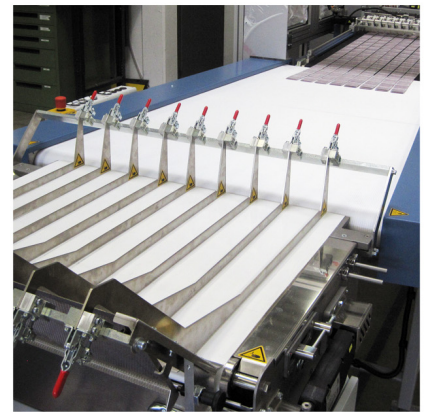

### **SSB 550 Stream-spreading conveyor, for inline production with BSR 550 Servo rotary die-cutter**

For practical and form-independent delivery of every kind of die-cut products

- Short and simple set-up
- Precise stream
- Easy handling even with small products
- In combination with the breakout unit no transfer unit is required



## Technical details

<b>Infeed width</b>	550 mm
<b>Usable width</b>	Continuously adjustable from 600 mm - 810 mm
<b>Spreading</b>	0% up to 30%
<b>Stream overlap</b>	10 up to 100 mm
<b>Option</b>	Cassettes or delivery table
<b>Mobility</b>	Mobile on wheels
<b>Space requirement</b>	Ca. 3'250 mm x 1'250 mm (L x B)
<b>Weight</b>	Ca. 350 kg
<b>Power supply</b>	3 x 400VAC / N / PE 50/60Hz (standard)
<b>Fuse max.</b>	16 A
<b>Control</b>	24 Volt DC