

## Stream-spreading conveyor SSB 550


Delivery for shingling and spreading, new option to BSR 550 Servo



SB 550 Stream belt connected to BSR 550 Servo with new breakout unit



Direct delivery of the shingled products to the stream-spreading conveyor

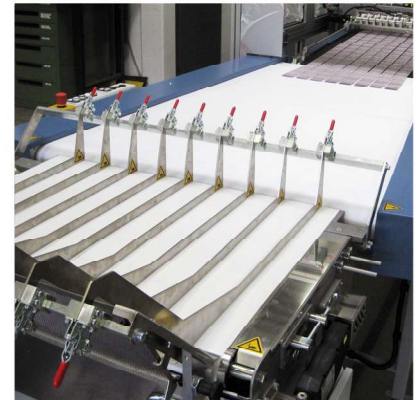

Delivery variant spreading belt with SB 810 Shaft delivery

### Facts and Figures:

#### Applications:

Practical and form-independent delivery of every kind of die-cut products

#### Streambelt SB 550:

- Width 550 mm
- Product format min. 42 x 63 mm
- Product format max. 530 x 730 mm

#### Spreading conveyor:

- Spreading 0° up to 30°
- Continuously adjustable, width 600 - 810 mm
- Option: cassetes or delivery table

#### Your advantages:

- Short and simple set-up
- Precise stream
- Easy handling even with small products
- In combination with the new breakout unit no transfer unit is required.

BOGRAMA's competency is die-cutting

