




SSB 550 Stream-spreading conveyor

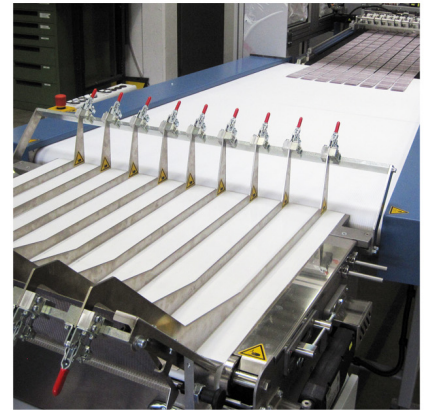

SSB 550 Stream-spreading conveyor, for inline production with BSR 550 Servo rotary die-cutter

For practical and form-independent delivery of every kind of die-cut products

- Short and simple set-up
- Precise stream
- Easy handling even with small products
- In combination with the breakout unit no transfer unit is required



Technical details

Infeed width	550 mm
Usable width	Continuously adjustable from 600 mm - 810 mm
Spreading	0% up to 30%
Stream overlap	10 up to 100 mm
Option	Cassettes or delivery table
Mobility	Mobile on wheels
Space requirement	Ca. 3'250 mm x 1'250 mm (L x B)
Weight	Ca. 350 kg
Power supply	3 x 400VAC / N / PE 50/60Hz (standard)
Fuse max.	16 A
Control	24 Volt DC