



SAB 600 S Stream and Spreading Delivery



Optimized stream delivery for efficient inline production.

Shingling and spreading combined in one process – for structured product flow and easy handling.

The **SAB 600 S Stream Delivery** from BOGRAMA is designed for precise shingling, spreading and delivery of product streams in inline applications with the **BSR 550 Servo Rotary Die-Cutter**.

By combining shingling and spreading in a single process, the system ensures a clean and well-structured flow of up to 9 product streams. This significantly improves handling – especially for small-format, multi-up production.

Shingling rolls and adjustable belts allow flexible adaptation to different product sizes, while ensuring clean separation and clear arrangement of the





product streams on the delivery table.

Key features:

- Combined shingling and spreading in one process
- Clean separation of up to 9 product streams
- Adjustable shingling rolls for different formats
- Spreading belts for improved product accessibility
- Motorized height adjustment for ergonomic operation
- Operating modes: continuous, sheet-by-sheet, jump feed

Applications:

Inline shingling, spreading and delivery of multi-up products with high format variability.


Formats:

Minimum: 42 × 63 mm

Maximum: 600 × 730 mm

Working width: 600 mm

Designed for flexible, efficient and ergonomic inline production.

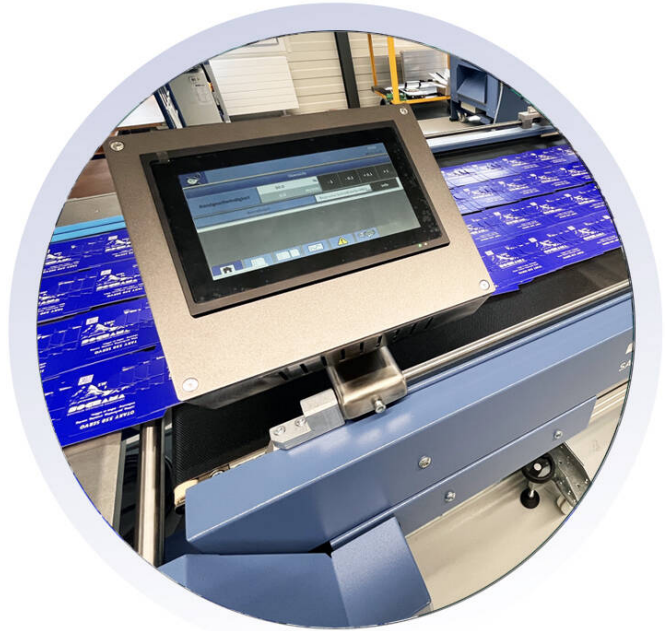



Technical details

Working width	max. 600 mm
Height adjustment	motor driven, 830 - 1.120 mm
Feed	stream belt with shingling rolls
Spreading unit	adjustable belts to spread the product streams
Product streams	1 - 9
Formats	min. 42 x 63 mm, max. 600 x 730 mm
Speed	0 - 15 m/min, adjustable
Operating modes	continuous, sheet-by-sheet, jump feed
Counter	daily and job counters
Space requirement	ca. 2'600 x 1'100 mm (L x W)
Weight	approx. 320 kg
Power supply	3 x 400VAC / N / PE 50/60Hz / 16A (Standard)