




BS MULTI 450 / *750 Servo with front cut unit at infeed

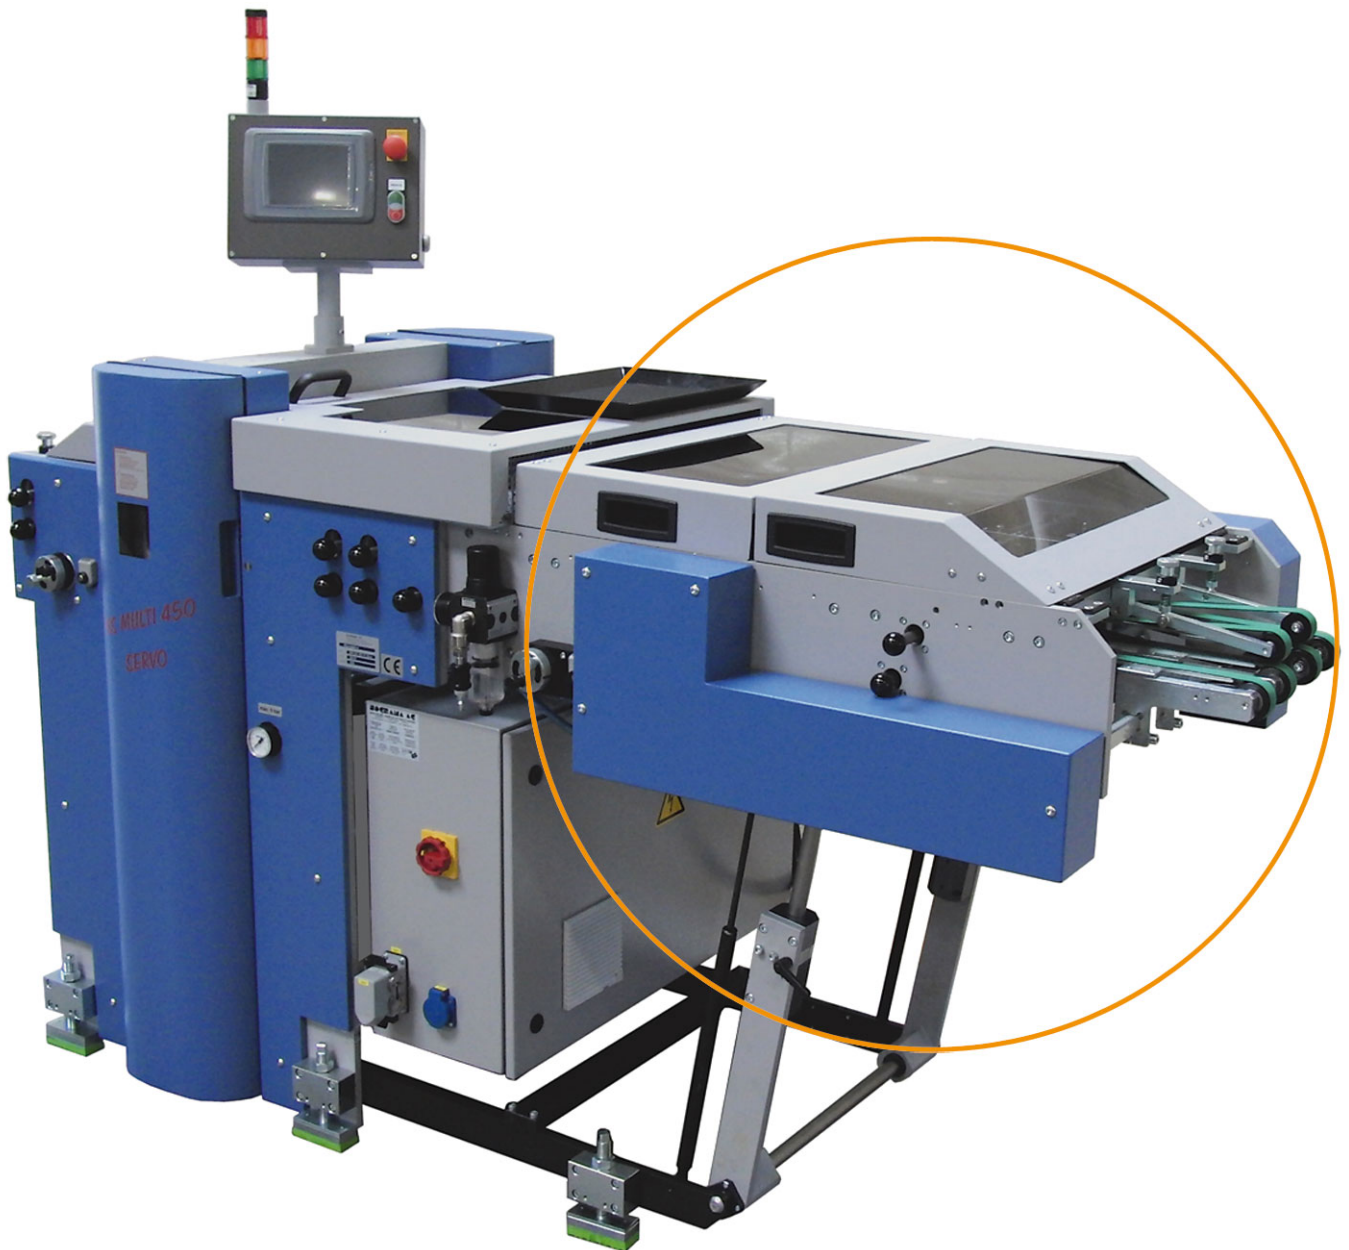

The BSM 750 Servo with integrated front trim lends the booklet its final form.

Front trim, head and foot trim, and blank separation are performed in one operation.



Technical details

Capacity	max. 8'000 cycles/h up to 2,5 mm product thickness up to 7'000 cycles/h with 2,5 - 3 mm product thickness (depending on format and quality)
Drive	servo motor, 3,5 kW
Feed	adjustable belt transfer with lower and upper belt, lenght 1'300 mm, swivel area 540 up to 950 mm
Exit hight	940 mm
Working with max.	max. 450 mm / min. 45 mm
Format min./max.	see separate data sheet BS MULTI
Max. product thickness	perforation up to 2 mm, filing-hole punching up to 5 mm, cutting up to 5 mm, die-cutting up to 2 mm (depending on format and quality)
Product alignment	stop- and side adjustment elements pneumatically operated
Timing control	pulse-independent by photo cell
Tool attachment	attachment for filing-hole and cutting tools, profile insert for perforating-tools, attachment for die-cutting-tools
Compressed air	6 bar (provided on site)
Transportable with	pallet truck
Space requirement	approx. 2'200 1'100 / *1'200 mm (L x W)
Weight	approx. 1'150 kg / *1'350 kg
Power supply	3 x 400VAC / N / PE / 50/60Hz / 32A

Accessory

- Cutting equipment
- Die-cutting equipment
- Hole punching systems